

## Peak Emission Wavelength: 1900nm

The 1900nm emitter is designed for applications requiring high output and precise optical / mechanical axis alignment. Custom package solutions and sorting are available.

### FEATURES

- > 3.5x2.2x1.24 Flat Top Ceramic SMT
- > High Reliability
- > High Output Power
- > Wide Beam Angle

### APPLICATIONS

- > Light Source For Emitters
- > Industrial Equipment
- > Machine Vision



## Absolute Maximum Ratings (Ta=25°C)



ITEMS	SYMBOL	RATINGS	UNIT
Forward Current	IF	100	mA
Forward Current (Pulse)*1	IFP	1	A
Reverse Voltage	VR	5	V
Power Dissipation	PD	120	mW
Operating Temperature Range	Topr	-20 ~ +80	°C
Storage Temperature Range	Tstg	-30 ~ +100	°C





\*1: Tw=10μsec, T=10msec.

## Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Power Output	PO	IF=50mA	--	2.1	--	mW
Forward Voltage	VF	IF=50mA	--	0.98	--	V
Reverse Current	IR	VR=5V	--	--	100	μA
Peak Emission Wavelength	λp	IF=50mA	--	1900	--	nm
Spectral Line Half Width	Δλ	IF=50mA	--	125	--	nm
Half Intensity Beam Angle	Θ	IF=50mA	--	±50	--	deg




Package Drawing

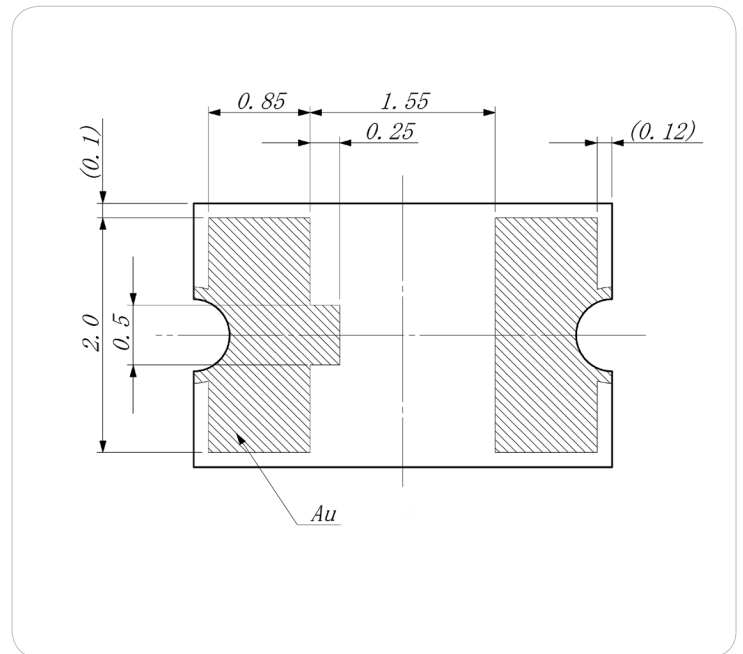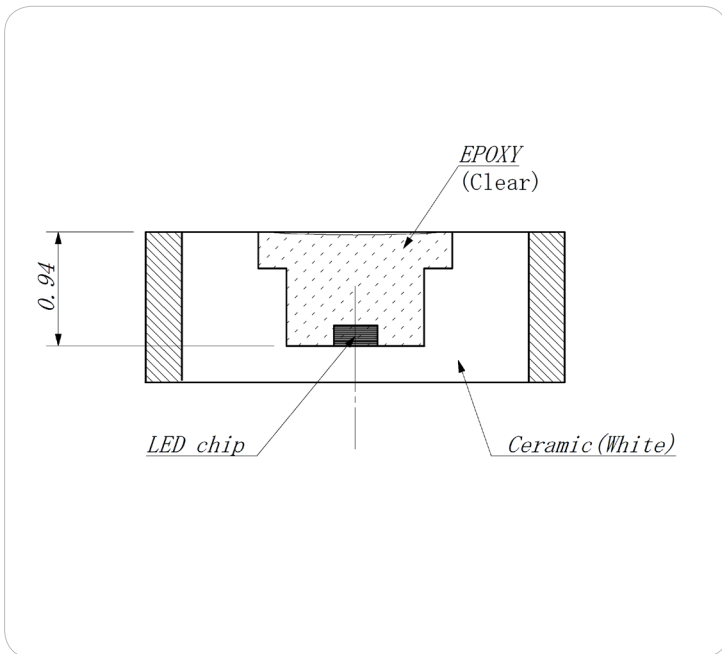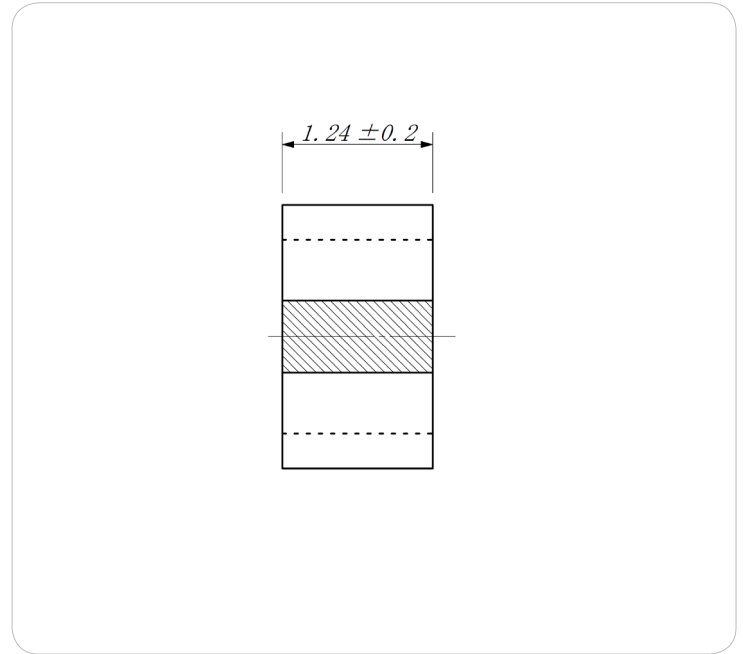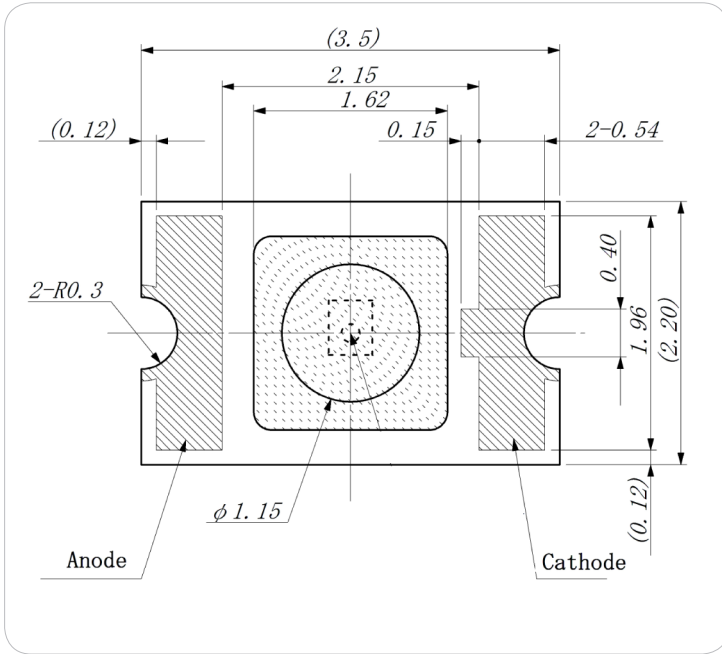


Unit: mm, Tolerance: ±0.2




### SPECTRAL RESPONSE

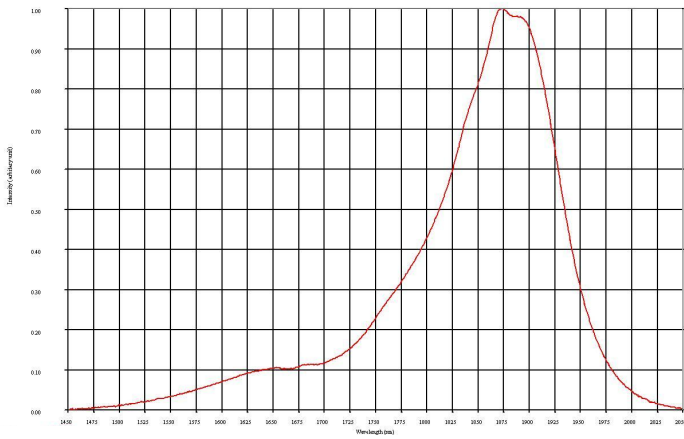

### RADIATION DISTRIBUTION

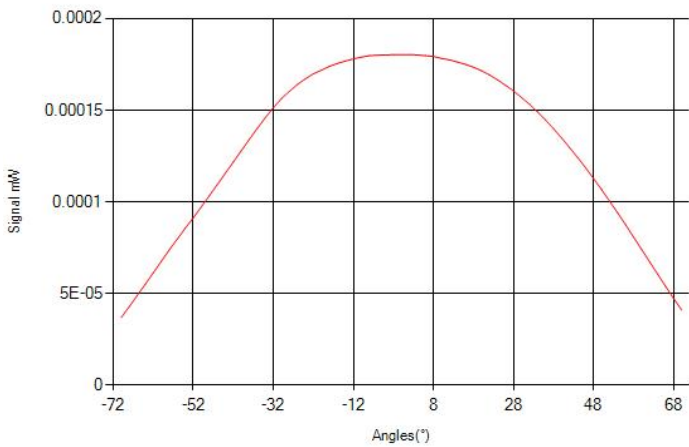


### VIEW ANGLE

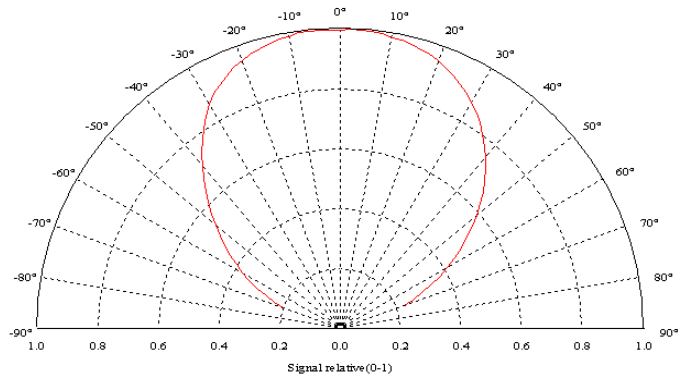




PULSE FORWARD CURRENT vs DUTY RATIO

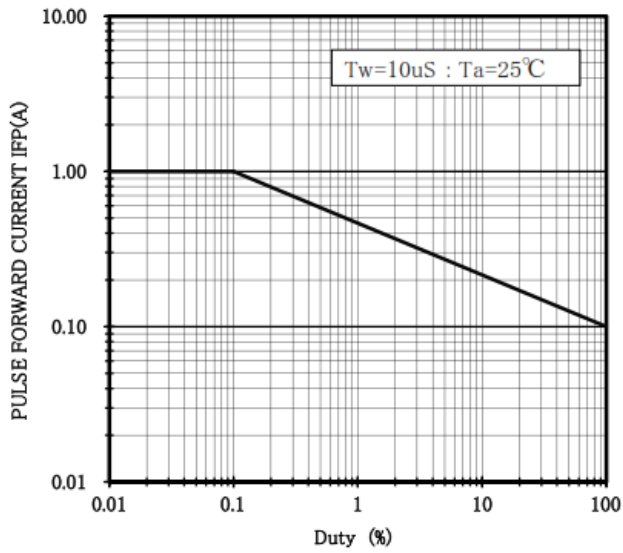

RELATIVE POWER vs FORWARD CURRENT

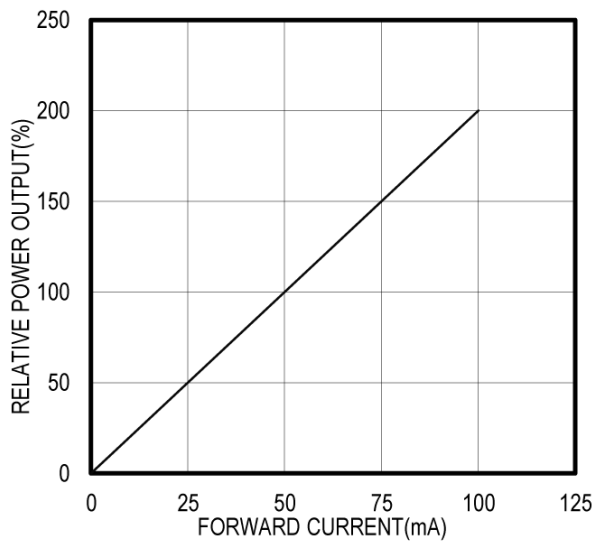

The information contained herein is subject to change without notice.

2026-02-02