

Peak Emission Wavelength: 425-430nm


The MT5430-UV is a UV T 1 3/4, 5mm water clear LED designed for applications requiring high brightness and high reliability packaged with straight leads.

FEATURES

- > High Brightness
- > High Reliability
- > Water Clear with Flange
- > Housing without Standoff Leads

APPLICATIONS

- > Currency Validation
- > Driver License & Passport Identification
- > Medical & Analytical Instruments
- > Fluorescence

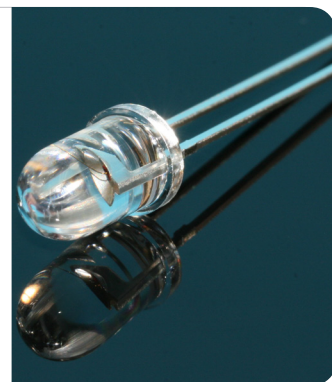

Absolute Maximum Ratings (Ta=25°C)



ITEMS	SYMBOL	RATINGS	UNIT
Forward Current	IF	25	mA
Peak Forward Current*1	IFP	100	mA
Power Dissipation	PD	95	mW
Operating Temperature Range	Topr	-40 ~ +85	°C
Storage Temperature Range	Tstg	-40 ~ +100	°C
Lead Soldering Temperature*2	Tls	260	°C
Reverse Voltage	VR	5	V

*1: Test Conditions: 1/10 duty cycle @ 1KHz. *2: Time <3 Sec, 1.6mm from case

Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	VF	IF=20mA	--	3.1	--	V
Reverse Current	VR	VR=5V	--	--	10	uA
Peak Emission Wavelength	λ_p	IF=20mA	425	--	430	nm
Viewing Angle	θ	IF=20mA	--	30	--	deg.
Spectral Bandwidth at 50%	$\Delta\lambda_{0.5}$	IF=20mA	--	20	--	nm
Lumious Intensity	IV	IF=20mA	300	450	--	mcd
Power Output	PO	IF=20mA	--	26	--	mW

RADIATION


Ultra Violet

TYPE

InGaN/SiC


CASE

5mm Plastic Lens

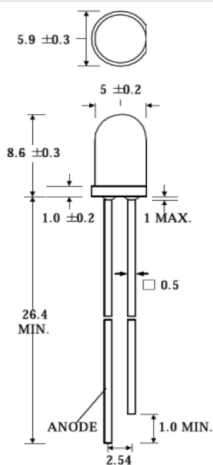


Notes:


- 1: Unit: mm
- 2: Lead spacing is measured where the lead emerge from the package.

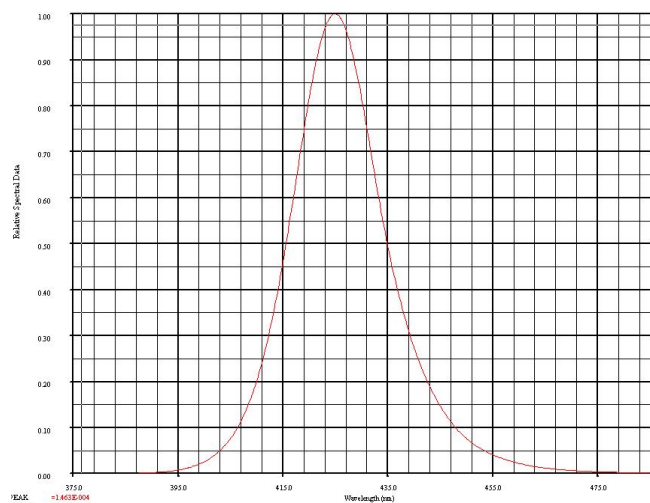


SPECTRAL RESPONSE

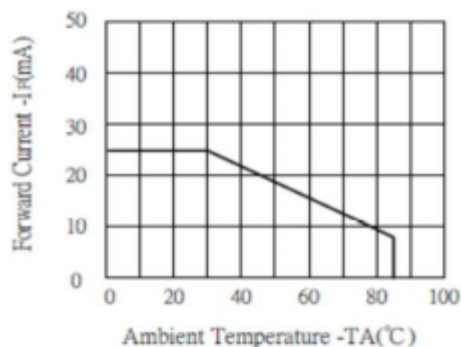


MAX FORWARD CURRENT Vs. AMBIENT TEMPERATURE

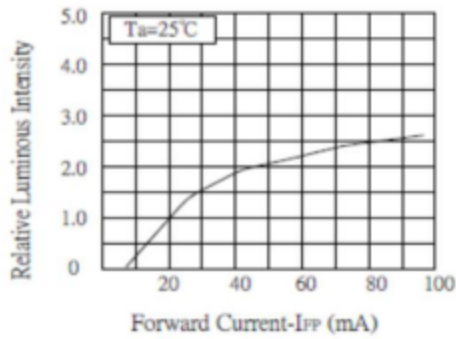


**LUMINOUS INTENSITY
Vs. FORWARD CURRENT**

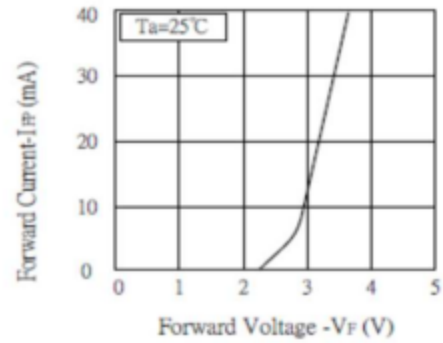


**FORWARD CURRENT
Vs. FORWARD VOLTAGE**

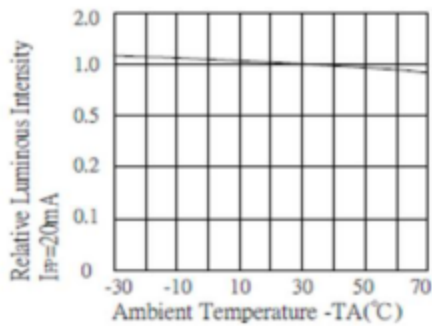

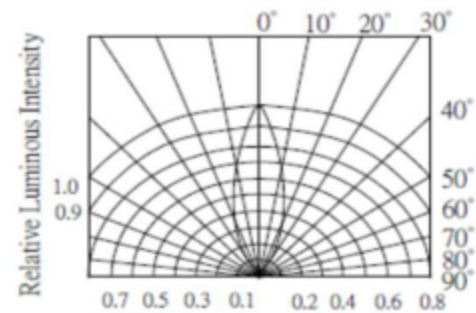

**LUMINOUS INTENSITY
Vs. AMBIENT TEMPERATURE**



RADIATION DIAGRAM





 **CAUTION**

1. LEDs emit very strong UV radiation during operation.
2. Don't look directly into the LED light when in operation as UV radiation can harm your eyes.
3. To prevent even inadequate exposure, wear protective eyewear.
4. If LEDs are embedded in devices, please indicate warning labels against the UV LED used.
5. Avoid prolonged exposure to skin or other tissue during operation.
6. Keep out of reach of children.
7. Take appropriate precautions around pets and other living organisms to avoid UV exposure.
8. Specification and dimension are subject to change without notice.

The information contained herein is subject to change without notice.

2022-10-12